


# Tutoriel : Exporter un enregistrement via Smart PSS

1. Depuis le Menu, sélectionnez "PlayBack"

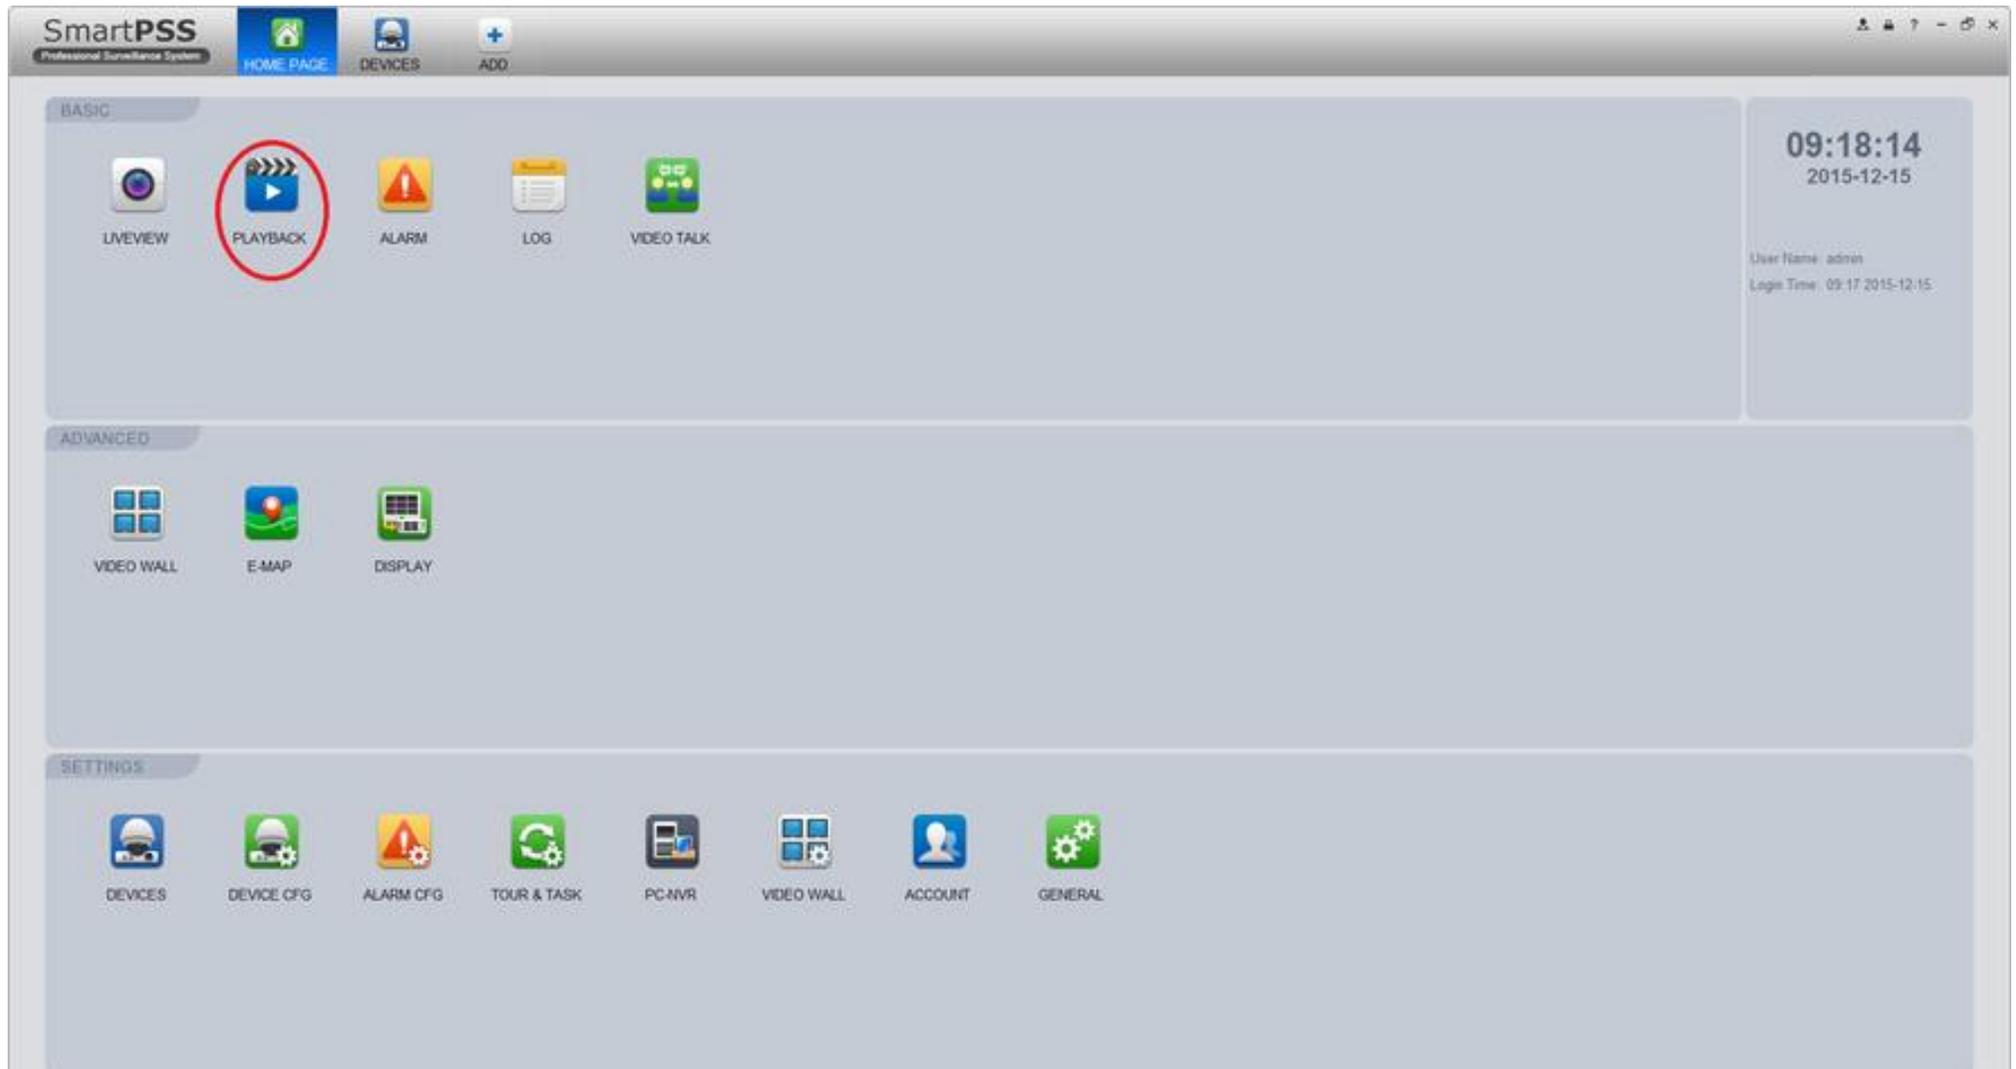

## 2. Sélectionnez la caméra de l'enregistrement

The screenshot displays the SmartPSS Professional Surveillance System interface. The top navigation bar includes 'HOME PAGE', 'PLAYBACK', 'DEVICES', and 'ADD'. The main area is a large dark grey rectangle with a clapperboard icon and a play button, indicating a video playback screen. The bottom section features a playback control bar with 'Record' and 'Event' buttons, a play button, a stop button, a next button, a volume slider, and a 'TX' button. Below the control bar is a table listing recorded events.

All	Device Name	Channel Name	Record Type	Start Time	Duration(Min)	File Length(MB)
1	Retail NVR	CAM 4	General Record	2015-12-15 00:00:00	60.02	206.38
2	Retail NVR	CAM 4	General Record	2015-12-15 01:00:01	59.98	205.00
3	Retail NVR	CAM 4	General Record	2015-12-15 02:00:00	0.02	0.75
4	Retail NVR	CAM 4	General Record	2015-12-15 02:01:35	58.42	199.75

On the right side, the 'Device' panel is visible, showing a tree view of the system hierarchy. The 'Retail NVR' folder is expanded, and the 'CAM 4' entry is selected and highlighted with a red circle. Other entries include 'IPC', 'CAM 5', 'IP PTZ D', 'CAM 4', 'CAM 1', 'CAM 2', 'CAM 3', 'CAM 4', 'CAM 5', 'CAM 6', 'CAM 7', 'CAM 8', 'CAM 1', 'CAM 2', 'CAM 3', 'CAM 4', 'CAM 5', 'CAM 6', 'CAM 7', 'CAM 8', 'IPC', 'CAM 3', 'CAM 24', 'CAM 25', 'CAM 26', 'CAM 27', 'CAM 28', 'CAM 29', and 'CAM 30'. Below the device list, there are options for 'View' (Record, Picture), 'Type' (All), 'Stream' (Main Stream), and 'Card ID' (empty). The date range is set from '2015-12-15 00:00:00' to '2015-12-15 23:59:59', and a 'Search' button is present.

### 3. Sélectionnez "Record"

The screenshot displays the SmartPSS Professional Surveillance System interface. The top navigation bar includes 'HOME PAGE', 'PLAYBACK', 'DEVICES', and 'ADD'. The main area shows a large play button icon. The bottom control bar features 'Record' and 'Event' buttons, along with playback controls like play, stop, next, previous, and volume. A table at the bottom lists recording events, and a right-hand sidebar shows a device tree with 'Record' and 'Picture' options circled in red.

All	Device Name	Channel Name	Record Type	Start Time	Duration(Min)	File Length(MB)
1	Retail NVR	CAM 4	General Record	2015-12-15 00:00:00	60:02	205.38
2	Retail NVR	CAM 4	General Record	2015-12-15 01:00:01	59:58	205.00
3	Retail NVR	CAM 4	General Record	2015-12-15 02:00:00	0:02	0.75
4	Retail NVR	CAM 4	General Record	2015-12-15 02:01:35	58:42	199.76

#### 4. Choisissez les heures de début (flèche bleue) et de fin (flèche rouge)

The screenshot displays the SmartPSS Professional Surveillance System interface. The top navigation bar includes 'HOME PAGE', 'PLAYBACK', 'DEVICES', and 'ADD'. The main video area shows a clapperboard icon. The right sidebar shows a device tree with 'Retail NVR' expanded, listing various cameras (CAM 1-8, CAM 24-25). A date selection calendar is open, showing December 2015. The bottom table lists recording events for CAM 4. A red box highlights the 'From' and 'To' time selection fields, with a blue arrow pointing to the 'From' field and a red arrow pointing to the 'To' field.

All	Device Name	Channel Name	Record Type	Start Time	Duration(Min)	File Length(Min)
1	Retail NVR	CAM 4	General Record	2015-12-15 00:00:00	60:02	26:38
2	Retail NVR	CAM 4	General Record	2015-12-15 01:00:01	59:58	26:00
3	Retail NVR	CAM 4	General Record	2015-12-15 02:00:00	0:02	0:05
4	Retail NVR	CAM 4	General Record	2015-12-15 02:01:35	58:42	199:75

## 5. Cliquez sur "Search"

The screenshot displays the SmartPSS Professional Surveillance System interface. The top navigation bar includes 'HOME PAGE', 'PLAYBACK', 'DEVICES', and 'ADD'. The main area is currently blank, showing a play button icon. On the right side, there is a 'Device' tree view under the 'Local' tab, listing various cameras and PTZ devices. Below the tree view, there are controls for 'View' (Record/Picture), 'Type' (All), 'Stream' (Main Stream), 'Card ID', and a date range selector set to 'From 2015-12-15 00:00:00'. A red circle highlights a blue 'Search' button located at the bottom right of the interface.

All	Device Name	Channel Name	Record Type	Start Time	Duration(Min)	File Length(MB)
1	Retail NVR	CAM 4	General Record	2015-12-15 00:00:00	60:02	205.38
2	Retail NVR	CAM 4	General Record	2015-12-15 01:00:01	59:58	205.00
3	Retail NVR	CAM 4	General Record	2015-12-15 02:00:00	0:02	0.75
4	Retail NVR	CAM 4	General Record	2015-12-15 02:01:35	58:42	199.76

## 6. Sélectionnez l'enregistrement à exporter

The screenshot displays the SmartPSS Professional Surveillance System interface. The top navigation bar includes 'HOME PAGE', 'PLAYBACK', 'DEVICES', and 'ADD'. The main area is a large video player with a play button icon. Below the player is a control bar with 'Record' and 'Event' buttons, and playback controls. At the bottom, a table lists recorded events. The first four rows of the table are highlighted with a red box, indicating they are selected for export.

All	Device Name	Channel Name	Record Type	Start Time	Duration(Min)	File Length(MB)
<input checked="" type="checkbox"/>	1 Retail NVR	CAM 4	General Record	2015-12-15 00:00:00	60:02	206.38
<input checked="" type="checkbox"/>	2 Retail NVR	CAM 4	General Record	2015-12-15 01:00:01	59:58	205.00
<input checked="" type="checkbox"/>	3 Retail NVR	CAM 4	General Record	2015-12-15 02:00:00	0:02	0.75
<input checked="" type="checkbox"/>	4 Retail NVR	CAM 4	General Record	2015-12-15 02:01:35	58:42	199.76

## 7. Cliquez sur la disquette (entourée en rouge)

The screenshot displays the SmartPSS Professional Surveillance System interface. The top navigation bar includes 'HOME PAGE', 'PLAYBACK', 'DEVICES', and 'ADD'. The main area is currently empty, showing a clapperboard icon. The right sidebar shows a 'Device' list with various camera channels. The bottom section features a playback control bar and a table of recorded events. A red circle and arrow highlight a floppy disk icon in the bottom right corner of the interface.

All	Device Name	Channel Name	Record Type	Start Time	Duration(Min)	File Length(MB)
1	Retail NVR	CAM 4	General Record	2015-12-15 00:00:00	60:02	205.38
2	Retail NVR	CAM 4	General Record	2015-12-15 01:00:01	59:58	205.00
3	Retail NVR	CAM 4	General Record	2015-12-15 02:00:00	0:02	0.75
4	Retail NVR	CAM 4	General Record	2015-12-15 02:01:35	58:42	199.75

8. Sélectionnez le chemin où vous voulez sauvegarder en cliquant sur "Browse"

9. Pour finir sélectionnez le format d'export souhaité (Original Format, ASF, AVI, MP4) et cliquez sur "OK"

The screenshot displays the SmartPSS Professional Surveillance System interface. A central dialog box titled "Export Setup" is open, featuring a "Path" field containing the text "H:\SmartPSS\Record\Download\" and a "Browse" button. A red circle highlights the "Browse" button, and a red arrow points to it from the left. Below the path field, the "Export Format" is set to "Original Format". There is also an unchecked checkbox for "Export Smart Player" and a "Free Space" indicator showing 1772677MB. At the bottom of the dialog are "OK" and "Cancel" buttons. The background interface includes a top navigation bar with "HOME PAGE", "PLAYBACK", "DEVICES", and "ADD" buttons. On the right, a "Device" tree shows a hierarchy starting with "Retail NVR" and listing various camera channels (CAM 1 through CAM 29). At the bottom, a table displays a list of records with columns for Device Name, Channel Name, Record Type, Start Time, Duration, and File Length.

	Device Name	Channel Name	Record Type	Start Time	Duration(Min)	File Length(MB)
1	Retail NVR	CAM 4	General Record	2015-12-15 00:00:00	60:02	205.38
2	Retail NVR	CAM 4	General Record	2015-12-15 01:00:01	59:58	205.00
3	Retail NVR	CAM 4	General Record	2015-12-15 02:00:00	0:02	0.75
4	Retail NVR	CAM 4	General Record	2015-12-15 02:01:35	58:42	199.75